

Glass in building — Insulating glass units

Part 5: Evaluation of conformity

The European Standard EN 1279-5:2005 has the status of a
British Standard

ICS 81.040.20

National foreword

This British Standard is the official English language version of EN 1279-5:2005.

The UK participation in its preparation was entrusted by Technical Committee B/520, Glass and glazing in building, to Subcommittee B/520/2, Glass and glazing in building — Insulated glass products, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 31 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 13 January 2006

© BSI 13 January 2006

EUROPEAN STANDARD

EN 1279-5

NORME EUROPÉENNE

EUROPÄISCHE NORM

May 2005

ICS 81.040.20

English version

Glass in building - Insulating glass units - Part 5: Evaluation of conformity

Verre dans la construction - Vitrage isolant préfabriqué scellé - Partie 5: Evaluation de la conformité

Glas im Bauwesen - Mehrscheiben-Isolierglas - Teil 5: Konformitätsbewertung

This European Standard was approved by CEN on 24 March 2005.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

	Page
Foreword	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	5
4 Requirements	6
4.1 Product description	6
4.2 Conformity with the definition of insulating glass units	6
4.3 Determination of the characteristic's performances	6
4.4 Durability	10
4.5 Dangerous substances	10
5 Evaluation of conformity	10
5.1 General	10
5.2 Initial type testing of the product (see 5.1, b))	11
5.3 Factory production control and inspection of samples in accordance with a prescribed test plan (5.1, 1) and 2))	13
5.4 Initial inspection of factory and of factory production control (5.1, a), 2))	14
5.5 Continuous surveillance and assessment of the factory production control (5.1, e))	15
6 Marking and/or labelling	16
6.1 General	16
6.2 Product marking	16
6.3 Product characteristics	16
6.4 "Characteristics/performance identification paper"	16
Annex A (informative) Use of IGUs when subjected to UV and/or in SSG	17
Annex B (informative) Installation of the insulating glass units	18
Annex C (informative) Provisions for voluntary involvement of third party(ies)	21
<u>Annex ZA</u> (informative) Clauses of this European Standard addressing the provisions of EU Construction Products Directive	22
Bibliography	31

Foreword

This European Standard (EN 1279-5:2005) has been prepared by Technical Committee CEN/TC 129 "Glass in building", the secretariat of which is held by IBN/BIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2005, and conflicting national standards shall be withdrawn at the latest by November 2005.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

No existing European Standard is superseded.

This Part of the European Standard does not stand-alone, it is part of one standard with the general title *Glass in building - Insulating glass units*:

- *Part 1: Generalities, dimensional tolerances and rules for the system description*
- *Part 2: Long term test method and requirements for moisture penetration*
- *Part 3: Long term test method and requirements for gas leakage rate and for gas concentration tolerances*
- *Part 4: Methods of test for the physical attributes of edge seals*
- *Part 5: Evaluation of conformity*
- *Part 6: Factory production control and periodic tests*

This European Standard contains other aspects of importance of trade.

This European Standard includes a Bibliography.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

1 Scope

This European Standard specifies requirements, the evaluation of conformity and the factory production control of insulating glass units for use in buildings.

NOTE 1 For glass products with electrical wiring or connections for e.g. alarm or heating purposes, other directives, e.g. Low Voltage Directive, may apply.

The main intended uses of the insulating glass units are installations in windows, doors, curtain walling, roofs and partitions where there exists protection against direct ultraviolet radiation at the edges.

NOTE 2 In cases where there is no protection against direct ultra-violet radiation at the edges, such as structural sealant glazing systems, additional European technical specifications should be followed (e.g. 00129113, prEN 13022-1).

NOTE 3 Units for which the intended use is only 'artistic' and therefore no essential requirement is required, are not subject to CE marking and are not part of this European Standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 356, *Glass in building – Security glazing – Testing and classification of resistance against manual attack*

EN 410, *Glass in building – Determination of luminous and solar characteristics of glazing*

EN 572-1, *Glass in building – Basic soda lime silicate glass products - Part 1: Definitions and general physical and mechanical properties*

EN 673, *Glass in building – Determination of thermal transmittance (U value) – Calculation method*

EN 674, *Glass in building – Determination of thermal transmittance (U value) – Guarded hot plate method*

EN 675, *Glass in building – Determination of thermal transmittance (U value) – Heat flow meter method*

EN 1063, *Glass in building – Security glazing – Testing and classification of resistance against bullet attack*

EN 1279-1:2004, *Glass in building – Insulating glass units – Part 1: Generalities, dimensional tolerances and rules for the system description*

EN 1279-2:2002, *Glass in building – Insulating glass units – Part 2: Long term test method and requirements for moisture vapour penetration*

EN 1279-3:2002, *Glass in building – Insulating glass units – Part 3: Long term test method and requirements for gas leakage rate and for gas concentration tolerances*

EN 1279-4:2002, *Glass in building – Insulating glass units – Part 4: Methods of test for the physical attributes of edge seals*

EN 1279-6:2002, *Glass in building – Insulating glass units – Part 6: Factory production control and periodic tests*

EN 1748-1-1, *Glass in building – Special basic products – Borosilicate glasses – Part 1-1: Definition and general physical and mechanical properties*

EN 1748-2-1, *Glass in building – Special basic products – Part 2-1: Glass ceramics – Part 2-1: Definition and general physical and mechanical properties*

EN 1863-1, *Glass in building – Heat strengthened soda lime silicate glass – Part 1: Definition and description*

EN 12150-1, *Glass in building – Thermally toughened soda lime silicate safety glass – Part 1: Definition and description*

EN 12337-1, *Glass in building – Chemically strengthened soda lime silicate glass – Part 1: Definition and description*

EN 12600, *Glass in building – Pendulum test – Impact test method and classification for flat glass*

EN 12758, *Glass in building – Glazing and airborne sound insulation – Product descriptions and determination of properties*

EN 12898, *Glass in building – Determination of the emissivity*

prEN 13022-1, *Glass in building – Structural sealant glazing – Part 1: Glass products for structural sealant glazing systems – Supported and unsupported monolithic and multiple glazing*

EN 13024-1, *Glass in building – Thermally toughened borosilicate safety glass – Part 1: Definition and description*

EN 13501-1, *Fire classification of construction products and building elements – Part 1: Classification using test data from reaction to fire tests*

EN 13501-2, *Fire classification of construction products and building elements – Part 2: Classification using test data from fire resistance tests, excluding ventilation services*

prEN 13501-5, *Fire classification of construction products and building elements – Part 5: Classification using data from external fire exposure to roof tests*

EN 13541, *Glass in building – Security glazing – Testing and classification of resistance against explosion pressure*

EN 14178-1, *Glass in building – Basic alkaline earth silicate glass products – Part 1: Float glass*

EN ISO 12543-1, *Glass in building – Laminated and laminated safety glass - Part 1: Definition and description of component parts (ISO 12543-1:1998)*

3 Terms and definitions

For the purposes of this European Standard, the terms and definitions given in EN 1279-1:2004, EN 1279-2:2002, EN 1279-3:2002, EN 1279-4:2002 and EN 1279-6:2002 and the following apply.

3.1

initial type testing

determination of the performance of a product (characteristic, durability), on the basis of either actual tests or other procedures (such as conventional, standardised, tabulated or general accepted values, standardised or recognised calculation methods, test reports when made available,), in accordance with this European Standard that demonstrates compliance with this European Standard

3.2

test report

document that covers the results of tests undertaken on a representative sample of the product from production or on a prototype design of the product

3.3

product description

document that details the relevant parameters, e.g. process conditions, structure, etc, for defining a product that complies with the standard. It includes specific references to characteristics that are modified by the production process

3.4

significant change

variation in performance beyond the permitted tolerance for the characteristic

4 Requirements

4.1 Product description

For conformity purposes the insulating glass unit manufacturer is responsible for the preparation and maintenance of the product description. This description shall describe the product and/or product families.

Disclosure of the product description shall be at the discretion of the insulating glass unit manufacturer or his agent except in the case of regulatory requirements.

The description shall contain at least a normative part. The description may also contain an informative part, when the manufacturer foresees further development of the product.

The normative part of the description shall contain the following minimum information:

- a reference to EN 1279 Part 1, 2, 3, 4 and 6 and all other standards with which the manufacturer claims compliance;
- system description.

The definition of product families shall be consistent with the normative part of the product description.

The substitution of materials shall maintain the conformity with the product description. The substituting material can be added to the product family and also the product description when compliance has been demonstrated.

4.2 Conformity with the definition of insulating glass units

Products shall conform to the definition and fulfil the requirements of insulating glass units as defined in EN 1279-1.

4.3 Determination of the characteristic's performances

4.3.1 Characteristics of glass panes for use in insulating glass units

For panes made of glass covered by European specifications generally accepted values, declared values, or calculated values of the characteristics listed in Table 1 shall be used.

For panes made of glass not covered by European specifications measured values of the characteristics listed in Table 1 shall be used, and their chemical and mechanical stability over time shall be demonstrated (refer to 5.2.4).

Table 1 - Necessary information on characteristics of glass panes for use in insulating glass units

Characteristic	Symbol	Unit
- density	ρ	kg/m ³
- hardness	HK _{0,1/20}	GPa
- Young's modulus	E	Pa
- Poisson's ratio	μ	Dimensionless
- characteristic bending strength	f_k	Pa
- specific heat capacity	c	J/(kg·K)
- coefficient of linear expansion	α	K ⁻¹
- thermal conductivity	λ	W/(m·K)
- mean refractive index to visible radiation	n	Dimensionless
- emissivity	ε	Dimensionless
- light transmittance	τ_v	Dimensionless
- solar direct transmittance	τ_e	Dimensionless
- total solar energy transmittance	g	Dimensionless

4.3.2 Determination of characteristics of insulating glass units

4.3.2.1 General

If the insulating glass manufacturer wishes to claim that any performance characteristic is independent of the production equipment used then the factory production control system shall be in accordance with this European Standard including his specific process control conditions.

4.3.2.2 Safety in the case of fire - Resistance to fire

Fire resistance shall be determined and classified in accordance with EN 13501-2.

NOTE EN 357 may be used as a classification reference specific to fire resistant glazed elements.

4.3.2.3 Safety in the case of fire - Reaction to fire

Reaction to fire shall be determined and classified in accordance with EN 13501-1.

For classification, consideration shall be given to:

- a) the following product changes require new type testing on reaction to fire:
 - reduction of the reaction to fire classification of the glass components in the insulating glass unit;
 - reduction of the reaction to fire performance of the organic sealant in the edge seal;
- b) however when not tested, the insulating glass unit shall be classified either:
 - by the reaction to fire classification of the glass component used in the insulating glass unit, or
 - by the classification of an insulating glass units using the same organic sealant in the edge seal,

EN 1279-5:2005 (E)

— the classification claimed shall be the lower of the two possibilities.

4.3.2.4 Safety in the case of fire - External fire performance

Where the manufacturer wishes to declare external fire performance (e.g. when subject to regulatory requirements), the product shall be tested and classified in accordance with prEN 13501-5.

NOTE Compliance with this requirement is not possible until a version of prEN 13501-5 later than 2002 becomes available.

For classification, consideration shall be given to:

- a) the following product changes require new type testing on external fire behaviour:
 - reduction of external fire behaviour of the glass component in the insulating glass unit;
- b) however when not tested, the insulating glass unit shall be classified by the external fire performance of the glass components used in the insulating glass unit. The classification claimed shall be that of the glass component with least performance.

4.3.2.5 Safety in use - Bullet resistance: shatter properties and resistance to attack

Bullet resistance shall be determined and classified in accordance with EN 1063.

In those instances when a bullet resistant glass component is used as the non-attack face of an insulating glass unit then there is no need to test. The classification of the insulating glass unit shall be the same as the glass component used.

4.3.2.6 Safety in use - Explosion resistance: shatter properties and resistance to impact

Explosion resistance shall be determined and classified in accordance with EN 13541.

In those instances when an explosion resistant glass component is used as the non-attack face of an insulating glass unit then there is no need to test. The classification of the insulating glass unit shall be the same as the glass component used.

4.3.2.7 Safety in use - Burglar resistance shatter properties and resistance to attack

Burglar resistance shall be determined and classified in accordance with EN 356.

In those instances when a burglar resistant glass component is used as the non-attack face of an insulating glass unit then there is no need to test. The classification of the insulating glass unit shall be the same as the glass component used.

4.3.2.8 Safety in use - Pendulum body impact resistance: shatter properties (safe breakability) and resistance to impact

Pendulum body impact resistance shall be determined and classified on the glass components in accordance with EN 12600.

NOTE EN 12600 tests and classifies individual pane of glass and NOT products such as insulating glass units.

As not tested, the insulating glass unit shall be classified the same as the pendulum body impact resistance of the weakest glass component used in the insulating glass unit.

4.3.2.9 Safety in use - Mechanical resistance: Resistance against sudden temperature changes and temperature differentials

The resistance against sudden temperature changes and temperature differentials is a generally accepted value that is given in the appropriate standards: e.g. EN 1863-1, EN 12150-1, EN 12337-1, EN 13024-1, etc., and shall be ensured by compliance with this European Standard.

4.3.2.10 Safety in use - Mechanical resistance: Resistance against wind, snow, permanent load and/or imposed loads of the glass unit

The ordered assemblies of insulating glass units (thickness and types of glass components, cavity width) shall ensure the resistance against wind, snow, permanent load, and other mechanical, (quasi-) static action, which shall be checked in accordance with prEN 13474.

As long as on the concerned construction or building site no part of prEN 13474 is applicable, then the current method of determining mechanical resistance in the country of destination shall be applied.

The manufactured or supplied thickness of insulating glass shall conform to the ordered thickness and assembly.

The edge seal strength determined in accordance with EN 1279-4 is part of the definition of insulating glass units and is not subject for separate information. When additional ultraviolet resistance and/or increased mechanical resistance is required (e.g. where no protection against ultraviolet is applicable, or where insulating glass units are used in structural sealant glazing), the edge seal strength shall be determined in accordance with prEN 13022-1 using a sealant in accordance with 00129113. See Annex A.

4.3.2.11 Direct airborne sound reduction

The sound reduction indexes shall be determined in accordance with EN 12758.

4.3.2.12 Energy conservation and heat retention - Thermal properties

The thermal transmittance value (U-value) shall be determined by calculation in accordance with EN 673 with:

- emissivity ε : the declared value of the glass manufacturer. If the information is not available, the emissivity shall be determined in accordance with EN 12898;
- nominal thickness of the glass panes;
- nominal thickness of any other material layer, if any;
- the nominal cavity width; assuming that the panes are parallel;
- the nominal gas concentration $c_{i,O}$, or the final gas concentration $c_{i,f}$ (see EN 1279-3).

NOTE In the case of gas filled units EN 1279-3 should be consulted in order that the U -value for publication includes all the relevant negative aspects.

In those instances when the thermal transmittance value (U-value) cannot be calculated then it shall be determined by testing in accordance with EN 674 or EN 675.

4.3.2.13 Energy conservation and heat retention - Radiation properties: Light transmittance and reflectance

The light transmittance and reflectance shall be determined in accordance with EN 410.

4.3.2.14 Energy conservation and heat retention - Radiation properties: Solar energy characteristics

The solar energy characteristic shall be determined in accordance with EN 410.

4.4 Durability

When products conform to the definition of insulating glass unit as in 4.2, the characteristics' performances in 4.3.2 are ensured during an economically reasonable working life.

The durability of insulating glass units, including their characteristics, shall be insured by the following:

- compliance with this European Standard;
- compliance with instructions from the glass product manufacturer or supplier.

The manufacturer shall supply specific installation instructions or make reference to appropriate technical specifications, see also Annex B.

NOTE The durability of glass products depends on:

- building and construction movements due to various actions;
- building and construction vibrations due to various actions;
- deflection and racking of the glass support due to various actions;
- glass support design (e.g. drainage of infiltrated water in the rebate, prevention of direct contact between glass support members and glass);
- accuracy of glass support and glass support member dimensions;
- quality of the assembling of glass support members up to a glass support;
- quality of installation of the glass support into or onto the buildings or constructions;
- glass support expansion due to adsorbed moisture from the air or other sources;
- the quality of installation of the glass product into or onto its support.

4.5 Dangerous substances

Materials used in products shall not release any dangerous substances in excess of the maximum permitted levels specified in a relevant European Standard for the material or permitted in the national regulations of the Member State of destination.

5 Evaluation of conformity

5.1 General

Evaluation of conformity in accordance with this document shall be as a result of FPC and ITT in accordance with this European Standard.

1) Factory production control:

this shall include, the following:

- a) inspection of samples taken at the factory in accordance with a prescribed test plan;
- b) initial inspection of the factory and of factory production control;
- c) continuous surveillance and assessment of the factory production control.

2) Initial type testing of the product.

NOTE There may be a need to involve a third party, with 1b, 1c, and/or 2, for the purpose of regulatory marking (see Annex ZA).

5.2 Initial type testing of the product (see 5.1, 2))

5.2.1 General

All the product's characteristics shall be initial type tested to verify they are in conformity with the requirements of this European Standard. In addition instead of performing any actual testing, initial type testing may make use of:

- generally accepted and/or conventional and/or standardised values, in the Clause 2 referenced standards, or in publications that are referred to in these standards;
- standardised calculation methods and recognised calculation methods in Clause 2 referenced standards, or in publications that are referred to in these standards;
- test report(s) on the basis of 5.2.3 when made available;
- where components are used whose characteristics have already been determined, by the component manufacturer, on the basis of conformity with other product standards, these characteristics need not be reassessed providing they remain unchanged by the manufacturing process;
- release of dangerous substances may be assessed indirectly by controlling the content of the substance concerned;
- durability may be assessed indirectly by controlling the production processes according to this European Standard.

NOTE 1 Products CE marked in accordance with appropriate harmonised European specifications may be presumed to have the performances stated with the CE marking.

NOTE 2 There may be a need to involve a third party for the purpose of regulatory marking (see Annex ZA).

When actual testing is required then the Initial Type Testing (ITT) shall be undertaken on a sample representative of the product taken from direct production or a prototype, any plant and/ or line.

Whenever a change occurs in the raw material or the production process (subject to the definition of the family), which would change significantly one or more of the characteristics, the type tests shall be repeated for the appropriate characteristics.

5.2.2 Multiple lines/sites

If a manufacturer operates one and/or more lines and/or sites, the following can reduce the requirement for multiple Initial Type Testing (ITT):

- a) the manufacturers' technical file for a product shall specifically cover all sites and/or lines of the same manufacturer¹;
- b) the manufacturer shall establish a direct relationship between production control, initial type testing and on-going internal audit testing;
- c) the manufacturer shall have a responsible individual designated to ensure product compliance based on:

¹ The terms 'manufacturer' and 'producer' are understood as being synonyms (see CPD working document NB-CPD/02/019-issued 24 April 2002 – page1).

- the operation of a consistent Factory Production Control system on all applicable sites and/or lines;
- the manufacturer having obtained evidence that shows the product to be consistent, with respect to both product characteristics and intended use characteristics;
- the manufacturer has in place an internal auditing scheme, including product consistency.

5.2.3 Historic data

(a) For all characteristics except those listed in 5.2.4 the following applies:

Tests previously performed in accordance with the provisions of this document (same product, same characteristic(s), same or more onerous test method, sampling method and attestation of conformity) may be taken into account.

(b) For characteristics listed in 5.2.4, the following applies:

Tests previously performed in accordance with the provisions of this European Standard may be taken into account when all of the following conditions are met:

- 1) a Notified Body has confirmed the results of tests conducted by a non-notified body and is satisfied with the competence of the testing body;
- 2) tests have been conducted in accordance with a prEN version that shall not be materially different from the EN with regard to the impact on testing;
- 3) the test work has been completed before the end of the transition period, i.e. within 21 months of the date of availability of this document.

5.2.4 Initial type testing of Insulating glass units

To establish if a product conforms to the definition of insulating glass units initial type testing shall consist of fulfilling the requirements of Tables 2 and 3.

Table 2 - Seal performance, validation method and requirements for IGUs

Applicable to:	Seal performance:	Validation method: (Demonstration by means of available test report or by testing)	Requirement:
All systems of IGU	Moisture vapour penetration	EN 1279-2	refer to EN 1279-2
	Adhesion sealant-glass	EN 1279-4	refer to EN 1279-4
NOTE Tests can be carried out by different test laboratories.			

Table 3 - Seal performance, supplementary validation methods and supplementary requirements for gas-filled insulating glass units and units with coated glass

Applicable to:	Seal performance:	Validation method: (Demonstration by means of available test report or by testing)	Requirement:
Gas-filled IGU: Type of gas	Gas leakage rate	EN 1279-3	refer to EN 1279-3
Gas filled units: gas concentration		Subject of factory production control in accordance with EN 1279-6	refer to EN 1279-6:2002, Annex A.3
Seal bonding to glass coating	Adhesion: - sealant/coating - interlayers of coating	EN 1279-4:2002, Annex D	refer to EN 1279-4
NOTE Tests can be performed by different test laboratories.			

Substitution of materials and of components shall maintain the conformity of the system with the definition of insulating glass units. The relevant seal properties, components and the related derived requirements are summarized in EN 1279-1:2004, Tables B.1 and B.2, together with the validation methods.

The component manufacturer test reports may be used to validate the substitution. During factory production control the short climate test value of the test report shall be confirmed by the outcome value of the periodic test of the factory production control. Only one substitution shall be made at any one time. When a relevant material changes the short climate test shall be repeated (EN 1279-6:2002, B.4.2). When meeting the requirements, the substituting materials and components shall be added to the system description.

In case of system description (processed edge seal description) change, test report on prototype can be used. During factory production control the short climate test value of the test report shall be confirmed by the outcome value of the periodic test of the factory production control.

If glass panes are used which are not covered by European specifications, it shall be demonstrated that those glasses have a chemical and mechanical stability over time comparable with:

- soda lime silicate glass according to EN 572-1;
- or borosilicate glass according to EN 1748-1-1;
- or glass ceramics according to EN 1748-2-1;
- or alkaline earth silicate glass according to EN 14178-1.

5.2.5 Initial type testing of performances of characteristics (5.1, 2))

All characteristics in 4.3.2 shall be subject to initial type tests in accordance with 5.2.1.

5.3 Factory production control and inspection of samples in accordance with a prescribed test plan (5.1, 1) and 2))

Factory production control means the permanent internal control of production exercised by the manufacturer.

A factory production control according to EN 1279-6:2002, 3.1 satisfies. The EN 1279-6 summarises also the tests to be carried out by the manufacturer as part of the production control in the factory, and as further testing of samples taken at the factory in accordance with a prescribed test plan.

EN 1279-5:2005 (E)

In the case of components and materials substitution, when a relevant material changes the short climate test shall be repeated (EN 1279-6:2002, B.4.2).

Relevant materials are:

- sealants (inner and/or outer);
- spacer (excluding the profile if system description does not change);
- amount of dessicant and type of dessicant (if Tc and initial loss on ignition are different).

In the case of system description (processed edge seal description) change, test report on prototype can be used. During factory production control the short test value of the test report shall be confirmed by the outcome value of the periodic test of the factory production control.

NOTE 1 The short climate test as well as the other factory production control tests may be carried out by the manufacturer himself or be sub-contracted to a third party.

NOTE 2 A factory production control system similar to EN ISO 9001 made product specific to this European Standard is deemed to satisfy the requirements of this clause.

5.4 Initial inspection of factory and of factory production control (5.1, 1), 2))

The initial inspection of the factory and of the factory production control shall cover the parameters listed in Table 4 in conjunction with EN 1279-6:2002, Annex A.

NOTE 1 There may be a need to involve a third party for the purpose of regulatory marking (see Annex ZA).

Table 4 - Characteristics of interest for the Factory Production Control

Nr	Characteristic	Interested parameter related to the characteristic	For details, refer to EN 1279-6
1	Fire resistance Reaction to fire External fire	- Checking incoming materials - Checking production control - Labelling outgoing insulating glass units - Edge seal dimensions, gas filling rate, flatness and fogging - Periodic, low frequency tests and inspections	Annexes A, B and C
2	Release of dangerous substances	- Checking incoming materials	Annex A
3	Bullet resistance Explosion resistance Burglar resistance Human impact resistance Resistance against sudden temperature changes and temperature differentials Wind, snow, permanent and imposed load resistance of the glass unit Wind, snow, permanent and imposed load resistance of the edge seal	- Checking incoming materials - Checking production control - Labelling outgoing insulating glass units - Edge seal dimensions, gas filling rate, flatness and fogging - Periodic, low frequency tests and inspections	Annexes A, B and C
4	Sound reduction Light transmittance and reflection Solar energy characteristic Thermal conductivity	- Checking incoming materials - Checking production control - Labelling outgoing insulating glass units - Edge seal dimensions, gas filling rate, flatness and fogging - Periodic, low frequency tests and inspections	Annexes A, B and C

5.5 Continuous surveillance and assessment of the factory production control (5.1, 1c)

The continuous surveillance and assessment of the factory production control shall cover the parameters listed in Table 4 in conjunction with EN 1279-6:2002, Annex A.

NOTE There may be a need to involve a third party for the purpose of regulatory marking (see Annex ZA).

The frequency of production surveillance shall be twice per year for new production facilities or for facilities that do not already have an established factory production control system in accordance with this European Standard.

When assessment of FPC fails to identify major non-conformances during four successive assessments, the frequency can be reduced to once a year.

When a major non-conformance is recorded, the inspection shall be repeated within two month. The frequency of production surveillance shall return to, or remain at twice a year. When the repeated inspection also results in a non-conformance, then the production shall be subject within two months to a repeated initial inspection of the factory and of the factory production control together with a surveillance inspection. When this repeated initial inspection and surveillance inspection also results in a major non-conformance then the products are considered as no longer conforming to this European Standard.

6 Marking and/or labelling

6.1 General

All voluntary marking and/or labelling should comply with C.3.

Care shall be taken to ensure that any voluntary marking and/or labelling does not cause confusion with respect to the mandatory requirements.

NOTE All marking and/or labelling of product to demonstrate compliance with the regulatory requirement is detailed in Annex ZA.

6.2 Product marking

There is no requirement to mark insulating glass units.

6.3 Product characteristics

The manufacturer or his agent shall organise a system of references that allows for the following:

- the identification of exactly which characteristics have to be assessed (see 4.3.2);
- those characteristics that will be assessed;
- the values, classes, categories, etc. that have been determined for those characteristics.

This system shall be documented as part of the evaluation of conformity.

6.4 “Characteristics/performance identification paper”

The manufacturer shall prepare a “characteristics/performance identification paper” based on the information collected on the product characteristics (see 6.3). This document shall be part of the manufacturers technical file and is the basis for the accompanying information as required for regulator purposes.

The "characteristics/performance identification paper" can be a catalogue in any media format (paper, disk, website, etc.), always identifiable by the reference that accompanies the marking with the product. The catalogue shall contain the values or classes of the characteristics for which a performance is declared. If no performance is declared, an indication of no performance determined (NPD) shall be made.

NOTE 1 The conditions of use of NPD are given in Annex ZA.

NOTE 2 The catalogue should not contain any information other than that relevant to the “characteristics/performance identification paper”.

Annex A (informative)

Use of IGUs when subjected to UV and/or in SSG

A.1 General

The scope of the EN 1279 series of standards does not cover the use of IGUs in these applications. However, IGUs are used in these applications and should be capable of offering the same durability and performance as an IGU used in a frame system.

A.2 System description

The manufacturer should be able to write a system description for this particular end use application.

The description should contain, over and above that required by EN 1279-1, the following information that is specific to this intended end use:

- a) design considerations, e.g. resistance against wind, snow, permanent load, and other mechanical, (quasi-)static action;
- b) dimensioning of the seal system in accordance with prEN 13022-1;
- c) specification of the ultra-violet resistant/structural sealant in accordance with 00129113;
- d) specific factory production control requirements over and above those in EN 1279-6.

A.3 Testing

The durability of the insulating glass unit design should be determined by testing in accordance with EN 1279-2 and EN 1279-3. The performance of the ultra-violet resistant/structural sealant should be checked in accordance with EN 1279-4 and prEN 13022-1.

A.4 Evaluation of conformity

This should be in accordance with this European Standard taking account of the requirements for factory production control from EN 1279-6 and the system description.

A.5 Marking

Insulating glass units for this specific end use should be marked as follows:

Name or trade mark of the manufacturer;

EN 1279;

Special end use – UV and/or structural [as appropriate].

A.6 Regulatory marking

An example of a CE Marking label is shown as Figure ZA.2.

Annex B (informative)

Installation of the insulating glass units

B.1 General

In order to satisfy the relevant aspects of the performances related to health, safety and energy saving during an economically reasonable working life as it is aimed by the scope of this European Standard, it is recommended that the subclauses below relating to glazing and installation are followed.

B.2 Appropriate supports

Within this European Standard an appropriate support is understood as a support where:

- a) the sides of the insulating glass unit are covered by fixing beads or some other part of the support, and
- b) entrapment of stationary water, long term condensation and/or enhanced water vapour pressure against the seal of the insulating glass is prevented in order to avoid chemical and/or physical attack on the components of the insulating glass and to avoid excessive water vapour penetration into the insulating glass, and
- c) showing a sufficient stiffness to limit the edge deflection of the insulating glass unit under loads, such as wind and snow, to avoid reduction of service life, e.g. due to loss of adhesion. A means of obtaining a recommended minimum support stiffness is to consider when the support either over the height H or over the width B of the glazing together with an infill of low edge rigidity, e.g. a single glass, exhibits a deflection of $H/200$ or less, and $B/200$ or less, and a maximum of 12 mm for either when exposed to design loads, either as single load or as combined load.

B.3 Installation and glazing conditions

B.3.1 General

Depending on materials and devices used for installation and glazing, and depending on the system of insulating glass unit, the installation conditions may vary.

In the subclauses below, a number of general glazing and installation elements are summed up.

- a) Glazing and installation conditions are listed in prEN 12448 and in prEN ISO 14439.
- b) The insulating glass unit edge taking the load should be flush.
- c) For particular glazing and installation conditions in the case of
 - a specific system of insulating glass unit, or
 - a specific intended use such as explosion resistance glass, anti bullet glass, fire resistance glass etc.

Reference should be made to the non-confidential part of the system description of the insulating glass unit.

B.3.2 Compatibility

Glazing materials should be compatible with the insulating glass materials and components in such a way that the characteristics defined in this European Standard are not affected.

B.3.3 Protection of the edge seal against ultraviolet radiation

Protection against ultraviolet radiation is achieved by covering the edge seal.

NOTE The use of an ultra-violet resistant sealant in accordance with 00129113 could also be considered.

B.3.4 Pressure limits on glass and prevention of frictional movements

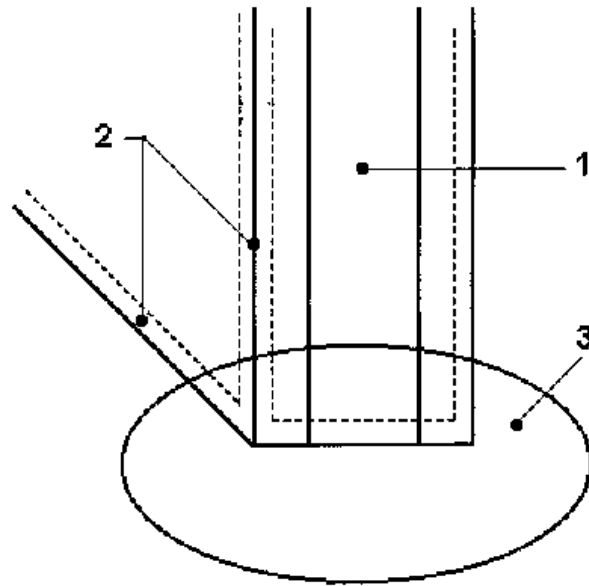
The pressures on glass due to the means of mechanical retention, e.g. beads and elastic profiles, and the means of adjustment, e.g. setting blocks, location blocks, and distance pieces should be as uniform as possible. Risks can be reduced by limiting the hardness of those means which are in contact with the glass.

When pressure is built up, it should not act near the intersection of the glass face and the cut edge of the glass. See prEN 12488 and Figure B.1. When pressure in the vicinity of the intersection is unavoidable, no frictional movement between glass and the means of adjustment or retention should occur.

No pressure should be built up on the glass on or near the corner. Means of adjustment subject to increased pressure such as setting blocks should be in accordance with prEN 12488 and prEN ISO 14439. Means of adjustment subject to low pressure such as a continuous strip under the cut edge of the glass, may be taken to the corner, but the corner itself should be free of pressure. No frictional movement between a corner and any means of adjustment or retention should occur.

B.3.5 Prevention of contact of glass with support

All contact between the insulating glass unit and those rigid parts of the support that could cause high local pressures should be prevented.



Key

- 1 Insulating glass unit
- 2 Intersection area
- 3 Corner area

Figure B.1 – Illustration of location of intersection areas and corner area

There should be no frictional movements in these areas.

There should be no pressure in the corner area.

Annex C (informative)

Provisions for voluntary involvement of third party(ies)

C.1 General

A manufacturer may employ third party(ies) for conformity assessment, which may involve a combination of initial type testing, inspection of factory production control, continuous surveillance and auditing of the product. The results of the conformity assessment may be used by the bodies acting for regulators in carrying out their assigned tasks.

C.2 Voluntary tasks for third parties

A third party may be voluntarily contracted to perform the initial type testing, inspection of factory production control, continuous surveillance and auditing of the product.

Where a third party is voluntarily involved in the evaluation of conformity of the insulating glass units covered by this document then the assessment should be in accordance with Clause 5, Evaluation of Conformity in this European Standard.

A manufacturer may also voluntarily involve a third party in the control of characteristics, e.g. visual aspects, colour, etc., that are over and above the characteristics required for regulatory purposes.

C.3 Marking and labelling

The format of the label and the position should be agreed between the body involved and the manufacturer.

All marks and/or labels of a voluntary nature should be so affixed as not to be confused with those marks and/or labels that are required for regulatory purposes.

In order to prevent confusion with any regulatory marking and/or labelling then any marking and/or labelling associated with the involvement of third party (ies) on a voluntary basis should be accompanied with the following warning: "This marking/labelling has no relationship with any product characteristic covered by any regulatory marking and/or labelling".

Annex ZA (informative)

Clauses of this European Standard addressing the provisions of EU Construction Products Directive

ZA.1 Scope and relevant characteristics

This European Standard has been prepared under a mandate M/135 “Flat glass, profiled glass and glass block products” given to CEN by the European Commission and the European Free Trade Association.

The clauses of this European Standard shown in this annex meet the requirements of mandate M/135 given under the EU Construction Products Directive (89/106/EEC).

Compliance with these clauses confers a presumption of fitness of the insulating glass units characteristics covered by this annex for the intended uses herein; reference should be made to the information accompanying the CE marking.

WARNING: Other requirements and other EU Directives, not affecting the fitness for intended uses, can be applicable to the insulating glass units falling within the scope of this European Standard.

NOTE 1 In addition to any specific clauses relating to dangerous substances contained in this standard, there may be other requirements applicable to products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the EU Construction Products Directive, these requirements need also to be complied with, when and where they apply.

NOTE 2 An informative database of European and national provisions on dangerous substances is available at the Construction web site on EUROPA (accessed through <http://europa.eu.int/comm/enterprise/construction/internal/dangsub/dangmain.htm>).

This annex has the same scope as Clause 1 of this standard with regard to the products covered. It establishes the conditions for the CE marking of insulating glass units intended for the use indicated below and shows the relevant clauses applicable (see Table ZA.1).

Construction Product: Insulating glass units

Intended uses: In buildings and construction works

The requirement on a certain characteristic is not applicable in those Member States where there are no regulatory requirements on that characteristic for the intended end use of the product. In this case, manufacturers placing their products on the market of these Member States are not obliged to determine nor declare the performance of their products with regard to this characteristic and the option “No performance determined” (NPD) in the information accompanying the CE marking (see ZA.3) may be used. The NPD option may not be used, however, where the characteristic is subject to a threshold level.

Table ZA.1 – Relevant clauses for Insulating glass units and intended use in buildings and construction works

Product: Insulating glass units as covered under the scope of this standard			
Intended use: In buildings and construction works			
Essential Characteristics	Requirements in the EN 1279-5	Mandated Levels and/or classes	Notes
Safety in the case of fire –			
Resistance to fire (for glass for use in a glazed assembly intended specifically for fire resistance)	4.2, 4.3.1 and 4.3.2.2	Any	Minutes
Reaction to fire	4.2, 4.3.1 and 4.3.2.3	All	Euroclasses
External fire performance (for roof coverings only)	4.2, 4.3.1 and 4.3.2.4	All	Euroclasses
Safety in Use –			
Bullet resistance: Shatter properties and resistance to attack	4.2, 4.3.1 and 4.3.2.5	-	Classes of convenience
Explosion resistance: Impact behaviour and resistance to attack	4.2, 4.3.1 and 4.3.2.6	-	Classes of convenience
Burglar resistance: Shatter properties and resistance to attack	4.2, 4.3.1 and 4.3.2.7	-	Classes of convenience
Pendulum body impact resistance: Shatter properties(safe breakability) and resistance to impact	4.2, 4.3.1 and 4.3.2.8	-	Classes of convenience
Mechanical resistance: Resistance against sudden temperature changes and temperature differentials	4.2, 4.3.1 and 4.3.2.9	-	K and/or °C
Mechanical resistance: Resistance against wind, snow, permanent and imposed load and/or imposed loads of the glass unit and edge seal when required	4.2, 4.3.1 and 4.3.2.10	-	mm
Protection against noise:-Direct airborne sound reduction	4.2, 4.3.1 and 4.3.2.11	-	dB

Table ZA.1 (concluded)

Energy conservation and heat retention:			
Thermal properties	4.2, 4.3.1 and 4.3.2.12	-	W/(m ² .K)
Radiation properties:			
- light transmittance and reflectance	4.2, 4.3.1 and 4.3.2.13	-	Fractions or %
- solar energy characteristics	4.2, 4.3.1 and 4.3.2.14	-	Fractions or %

ZA.2 Procedure(s) for the attestation of conformity of Insulating glass units

ZA.2.1 System(s) of attestation of conformity

The systems of conformity for insulating glass units indicated in Table ZA.1, are in accordance with the Decision of the Commission 2000/245/EC of 2000-02-02, amended by 01/296/EC and as given in Annex III of the mandate for "Flat glass, profiled glass and glass block products", is shown in Table ZA.2 for the indicated intended use(s) and relevant level(s) or classes:

Table ZA.2 – System(s) of attestation of conformity

Product(s)	Intended use(s)	Level(s) or class(es)	Attestation of conformity system(s)
Insulating glass units	For used in a glazed assembly intended specifically to provide fire resistance	Any	1
	For uses subject to reaction to fire regulations	Euroclasses A1, A2, B, C, D, E	3
		Euroclasses A1*, F	4
	For uses subject to external fire performance regulations	Products requiring testing	3
		Products "deemed to satisfy" without testing	4
	For use as anti-bullet, or anti-explosion glazing	-	1
	For other uses liable to present "safety-in-use" risks and subject to such regulations	-	3
For uses relating to energy conservation and/or noise reduction	-	3	
For uses other than those specified above	-	4	
System 1: see Directive 89/106/EEC (CPD) Annex III.2.(i), without audit-testing of samples.			
System 3: see Directive 89/106/EEC (CPD) Annex III.2.(ii), Second possibility.			
System 4: see Directive 89/106/EEC (CPD) Annex III.2.(ii), Third possibility			
* Products/materials that do not require to be tested for reaction to fire (e.g. Products/materials of Classes A1 according to Commission Decision 96/603/EC, as amended 2000/605/EC).			

The attestation of conformity of the insulating glass units in Tables ZA.1 shall be based on the evaluation of conformity procedures indicated in Tables ZA.3.1 to ZA.3.3 resulting from the application of the clauses of this or other European Standard indicated therein.

Where more than one table applies for the product, i.e. because its intended use makes different characteristics relevant, Table ZA.3.1 has to be read in conjunction with subsequent tables in order to determine which characteristics assigned by the manufacturer in Table ZA.3.1 are type tested by a notified test lab (system 3) and which by the manufacturer (system 4).

Table ZA.3.1 – Assignment of evaluation of conformity tasks for insulating glass units under system 1

Tasks		Content of the task	Evaluation of conformity clauses to apply
Tasks for the manufacturer	Factory production control (F.P.C.)	Parameters related to all relevant characteristics of Table ZA.1	5.3
	Further testing of samples taken at factory	All relevant characteristics of Table ZA.1	EN 1279-6:2002, Annex A
	Initial type testing	All relevant characteristics of Table ZA.1, except: - resistance to fire; - anti-bullet; - anti-explosion	5.2
Tasks for the notified body	Initial type testing	- Resistance to fire; - Anti-bullet; - Anti-explosion	5.2
	Initial inspection of factory and F.P.C.	Parameters related to all characteristics of Table ZA.1 relevant for the intended use in particular: - resistance to fire; - anti-bullet; - anti-explosion	5.4
	Continuous surveillance, assessment and approval of F.P.C.	Parameters related to all relevant characteristics of Table ZA.1, in particular: - resistance to fire; - anti-bullet; - anti-explosion	5.5

Table ZA.3.2 – Assignment of evaluation of conformity tasks for units under system 3

Tasks		Content of the task	Evaluation of conformity clauses to apply
Tasks for the manufacturer	Factory production control (F.P.C.)	Parameters related to all relevant characteristics of Table ZA.1	5.3
	Initial type testing	All other relevant characteristics of Table ZA.1 other than those shown below	5.2
Tasks for the notified body	Initial type testing	Reaction to fire (Classes A1, A2, B, C, D, E) External fire performance Burglar resistance Pendulum body impact resistance Direct airborne sound insulation Thermal properties Radiation properties: – light transmittance and reflection – solar energy characteristics	5.2

Table ZA.3.3 – Assignment of evaluation of conformity tasks for Insulating glass units under system 4

Tasks		Content of the task	Evaluation of conformity clauses to apply
Tasks for the manufacturer	Factory production control (F.P.C.)	Parameters related to all relevant characteristics of Table ZA.1	5.3
	Initial type testing	All relevant characteristics of Table ZA.1	5.2

ZA.2.2 EC Certificate and Declaration of conformity

In case of products with system 1: When compliance with the conditions of this Annex is achieved, the certification body shall draw up a certificate of conformity (EC Certificate of conformity), which entitles the manufacturer to affix the CE marking. This certificate shall include:

- name, address and identification number of the certification body;
- name and address of the manufacturer, or his authorised representative established in the EEA, and place of production;
- description of the product (type, identification, use, ...);
- provisions to which the product conforms (i.e. Annex ZA of this EN 1279-5);
- particular conditions applicable to the use of the product (e.g. provisions for use under certain conditions, etc.);
- the number of the certificate;
- conditions and period of validity of the certificate, where applicable;

- name of, and position held by, the person empowered to sign the certificate.

In addition, the manufacturer shall draw up a declaration of conformity (EC Declaration of conformity) including the following:

- name and address of the manufacturer, or his authorised representative established in the EEA;
- name and address of the certification body;
- description of the product (type, identification, use, ...), and a copy of the information accompanying the CE marking;
- provisions to which the product conforms (i.e. Annex ZA of this EN 1279-5);
- particular conditions applicable to the use of the product (e.g. provisions for use under certain conditions, etc.);
- number of the accompanying EC Certificate of conformity;
- name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or of his authorised representative.

In case of products under system 3: When compliance with the conditions of this Annex is achieved, the manufacturer or his agent established in the EEA shall prepare and retain a declaration of conformity (EC Declaration of conformity), which entitles the manufacturer to affix the CE marking. This declaration shall include:

- name and address of the manufacturer, or his authorised representative established in the EEA, and place of production;
- description of the product (type, identification, use,...), and a copy of the information accompanying the CE marking;
- provisions to which the product conforms (i.e. Annex ZA of this EN 1279-5);
- particular conditions applicable to the use of the product, (e.g. provisions for use under certain conditions, etc);
- name and address of the notified laboratory(ies);
- name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or his authorised representative.

In case of products under system 4: When compliance with this Annex is achieved, the manufacturer or his agent established in the EEA shall prepare and retain a declaration of conformity (EC Declaration of conformity), which entitles the manufacturer to affix the CE marking. This declaration shall include:

- name and address of the manufacturer, or his authorised representative established in the EEA, and place of production;
- description of the product (type, identification, use,...), and a copy of the information accompanying the CE marking;
- provisions to which the product conforms (i.e. Annex ZA of this EN 1279-5);
- particular conditions applicable to the use of the product (e.g. provisions for use under certain conditions, etc.);
- name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or of his authorised representative.

NOTE Duplication of information between the declaration and certificate should be avoided. To avoid duplication of information, cross-reference between documents may be made when one contains more information than the other.

The above mentioned declaration and certificate shall be presented in the official language or languages of the Member State in which the product is to be used.

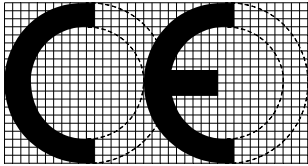
ZA.3 CE marking and labelling

The manufacturer or his authorised representative established within the EEA is responsible for the affixing of the CE marking. The CE marking symbol to affix shall be in accordance with Directive 93/68/EC and shall be shown on the Insulating glass units (or when not possible it may be on the accompanying label, the packaging or on the accompanying commercial documents e.g. a delivery note). The following information shall accompany the CE marking symbol:

- identification number of the certification body (only for products under systems 1);
- name or identifying mark and registered address of the producer;
- the last two digits of the year in which the marking is affixed;
- number of the EC Certificate of conformity or factory production control certificate (if relevant);
- reference to this European Standard;
- description of the product: generic name, material, dimensions, ... and intended use;
- information on those relevant essential characteristics listed in Table ZA.1 which are to be declared presented as:
 - declared values and, where relevant, level or class (including “pass” for pass/fail requirements, where necessary) to declare for each essential characteristic as indicated in "Notes" in Table ZA.1;
 - as an alternative, standard designation(s) alone or in combination with declared values as above, and;
 - “No performance determined” for characteristics where this is relevant.

The “No performance determined” (NPD) option may not be used where the characteristic is subject to a threshold level. Otherwise, the NPD option may be used when and where the characteristic, for a given intended use, is not subject to regulatory requirements in the Member State of destination.

Figures ZA.1 and ZA.2 give an example of the information to be given on the product, label, packaging and/or commercial documents.

	
AnyCo Ltd, PO Box 21, B-1050	
05	
EN 1279-5 Insulating glass unit, intended to be used in buildings and construction works <u>Characteristics</u> Resistance to fire npd Reaction to fire A1 External fire performance npd Bullet resistance npd Explosion resistance npd Burglar resistance npd Pendulum body impact resistance npd Resistance against sudden temperature changes and temperature differentials 100K Wind, snow, permanent and imposed load resistance 4 mm Direct airborne sound insulation 26 dB Thermal properties 1,4 W/(m ² K) Radiation properties: light transmission and reflection 0,88/0,10 solar energy characteristics 0,87/0,11	

CE conformity marking, consisting of the “CE”-symbol given in directive 93/68/EEC.

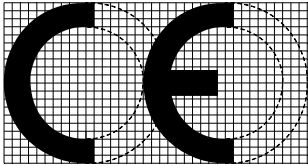
Name or identifying mark and registered address of the producer

Last two digits of the year in which the marking was affixed

No. of European Standard

Description of product and information on regulated characteristics

Figure ZA.1 - Example CE marking information

	
AnyCo Ltd, PO Box 21, B-1050	
05	
EN 1279-5 and special end use – UV and/or structural [as appropriate]	
Insulating glass unit, intended to be used in buildings and construction works	
<u>Characteristics</u>	
Resistance to fire	npd
Reaction to fire	A1
External fire performance	npd
Bullet resistance	npd
Explosion resistance	npd
Burglar resistance	npd
Pendulum body impact resistance	npd
Resistance against sudden temperature changes and temperature differentials	100K
Wind, snow, permanent and imposed load resistance	4 mm and class X
Direct airborne sound insulation	26 dB
Thermal properties	1,4 W/(m ² K)
Radiation properties:	
light transmission and reflection	0,88/0,10
solar energy characteristics	0,87/0,11

CE conformity marking, consisting of the “CE”-symbol given in directive 93/68/EEC.

Name or identifying mark and registered address of the producer

Last two digits of the year in which the marking was affixed

No. of European Standard

Description of product and information on regulated characteristics

Figure ZA.2 - Example CE marking information

In addition to any specific information relating to dangerous substances shown above, the product should also be accompanied, when and where required and in the appropriate form, by documentation listing any other legislation on dangerous substances for which compliance is claimed, together with any information required by that legislation.

NOTE European legislation without national derogations need not be mentioned.

Bibliography

- [1] EN 357, *Glass in building – Fire resistant glazed elements with transparent or translucent glass products – Classification of fire resistance*
- [2] prEN 13022-1, *Glass in building – Structural sealant glazing – Part 1: Glass products for structural sealant glazing systems – Supported and unsupported monolithic and multiple glazing*
- [3] EN ISO 9001, *Quality management systems – Requirements (ISO 9001:2000)*
- [4] prEN 12488, *Glass in building – Glazing requirements – Assembly rules*
- [5] prEN ISO 14439, *Glass in building –Glazing requirements – Use of glazing blocks*
- [6] 00129113², *Glass in building – Ultra-violet resistant sealant and structural sealant*

² This is a work item that originally was one of 3 parts dealing with structural sealant glazing. Anybody who has a previous draft dated March 2003 relating to this work item may not have the version that relates to this product standard.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.